

**WHERE QUALITY COMES FIRST**



## Easy-Pro

### In-Line Thermal Expansion Tanks

#### ■ general features

##### Advantages

Zilmet has over 50 years of experience in manufacturing high quality diaphragm expansion tanks

- Over 2 million square feet of production space
- Produces over 5 million tanks and 1 million heat exchangers annually
- Fully vertically integrated, designing and manufacturing all diaphragms internally

Zilmet has created a compact design with a seamless diaphragm that never stretches or creases

- There are no bubbles or corners to trap sediment, inhibiting bacterial growth
- International approvals for use with potable water to include NSF 61

##### Zilmet Thermal Expansion Tanks for Hot Water Heaters

- Prevent dangerous pressure build up
- Protect household appliances and fixtures
- Save energy and water

##### Technical Features

- All tanks are NSF61 Certified
- Each tank is factory leak tested to ensure tank integrity
- MIG welding eliminated interior rough spots and sharp edges
- Exclusive polypropylene liner eliminates internal corrosion
- External baked epoxy-polyester coating provides a durable appliance like finish
- Protected pre charge valve eliminates potential leak path
- 150 psi max pressure rating

#### ■ material description

description	material
shell	carbon steel
connection	stainless steel
fixed membrane	butyl
color	almond

#### ■ operating conditions

max. operating pressure	150 psi
operating temperature	210 °F
factory precharge	40 psi



## ■ technical and dimensional data



Model	Capacity gallons	Diameter inches(B)	Height inches(A)	Connection Size inches(C)	Max Acceptance Volume @ 40 psi gallons
ZEP5	2.1	7.9	11.0	3/4"	1.4
ZEP12	4.8	10.6	13.7	3/4"	3.3
ZEP18	6.3	11.8	15.4	3/4"	4.3
ZEP104IL	9.2	15.0	14.6	1"	6.3
ZEP200IL	13.2	15.0	19.6	1"	9

## ■ quick sizing chart

Applications up to 150°F			
Water Heater Size gallons	Supply pressure		
	40 psig	60 psig	80 psig
40	ZEP5	ZEP5	ZEP5
50	ZEP5	ZEP5	ZEP5
60	ZEP12	ZEP12	ZEP12
80	ZEP12	ZEP12	ZEP12
120	ZEP12	ZEP12	ZEP104IL
Applications up to 180F			
40	ZEP12	ZEP12	ZEP12
50	ZEP12	ZEP12	ZEP12
60	ZEP12	ZEP12	ZEP104IL
80	ZEP12	ZEP104IL	ZEP104IL
120	ZEP104IL	ZEP104IL	ZEP104IL

All thermal tanks must be properly sized and the pre-charge must be properly adjusted to equal the incoming water pressure.  
Please consult the installation manual for more details.

2.1-13.2 gallons  
IN LINE NO BASE

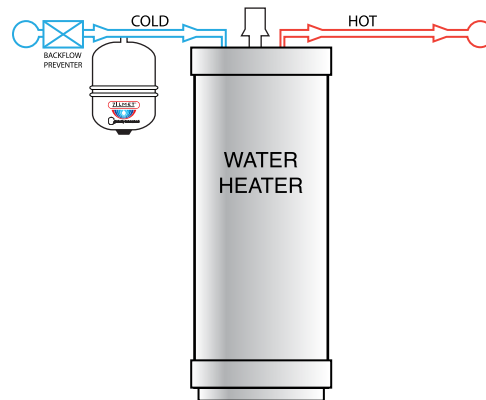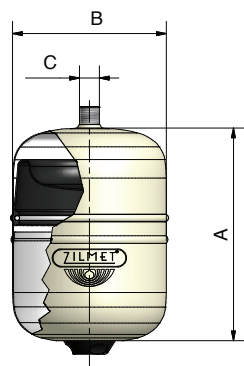

**North American Headquarters**  
**Zilmet USA**  
 400 Frenchtown Road  
 East Greenwich, RI 02818  
 401-884-4943  
 info@zilmetusa.com  
 www.zilmetusa.com

**Headquarters**  
 Via del Santo, 242 - 35010 Limena (PD) - Italy  
 Tel. +39 049 7664901 • Fax +39 049  
 767321  
 www.zilmet.it  
 zilmet@zilmet.it

**Production plants - Italy**  
 Limena (PD) Via del Santo, 242  
 Via Visco, 2 • Via Colpi, 30  
 Via Tamburin, 15/17  
 Bagnoli di Sopra (PD) - Via V Strada, 21/23

**Branches**  
 Zilmet Deutschland GmbH  
 www.zilmet.de  
 Zilmet USA  
 www.zilmetusa.com  
 Zilmet UK  
 www.zilmet.co.uk